

**Technical Report No. 23-08**

---

---

## **Eklutna River Aquatic Habitat Monitoring – 2021-2022**

by

**Ron Benkert and Josh Brekken**



February 2023

---

---

Alaska Department of Fish and Game

Habitat Section



## Symbols and Abbreviations

The following symbols and abbreviations, and others approved for the Système International d'Unités (SI), are used without definition in reports by the Divisions of Habitat, Sport Fish, and Commercial Fisheries. All others, including deviations from definitions listed below, are noted in the text at first mention, as well as in the titles or footnotes of tables, and in figures or figure captions.

<b>Weights and measures (metric)</b>		<b>General</b>		<b>Measures (fisheries)</b>	
centimeter	cm	Alaska Administrative Code	AAC	fork length	FL
deciliter	dL	all commonly accepted abbreviations	e.g., Mr., Mrs., AM, PM, etc.	mid-eye-to-fork	MEF
gram	g	all commonly accepted professional titles	e.g., Dr., Ph.D., R.N., etc.	mid-eye-to-tail fork	METF
hectare	ha	at	@	standard length	SL
kilogram	kg	compass directions:		total length	TL
kilometer	km	east	E		
liter	L	north	N	<b>Mathematics, statistics</b>	
meter	m	south	S	<i>all standard mathematical signs, symbols and abbreviations</i>	
milliliter	mL	west	W	alternate hypothesis	H <sub>A</sub>
millimeter	mm	copyright	©	base of natural logarithm	e
		corporate suffixes:		catch per unit effort	CPUE
		Company	Co.	coefficient of variation	CV
<b>Weights and measures (English)</b>		Corporation	Corp.	common test statistics	(F, t, $\chi^2$ , etc.)
cubic feet per second	ft <sup>3</sup> /s	Incorporated	Inc.	confidence interval	CI
foot	ft	Limited	Ltd.	correlation coefficient (multiple)	R
gallon	gal	District of Columbia	D.C.	correlation coefficient (simple)	r
inch	in	et alii (and others)	et al.	covariance	cov
mile	mi	et cetera (and so forth)	etc.	degree (angular)	°
nautical mile	nmi	exempli gratia	e.g.	degrees of freedom	df
ounce	oz	(for example)		expected value	E
pound	lb	Federal Information Code	FIC	greater than	>
quart	qt	id est (that is)	i.e.	greater than or equal to	≥
yard	yd	latitude or longitude	lat. or long.	harvest per unit effort	HPUE
		monetary symbols (U.S.)	\$, ¢	less than	<
		months (tables and figures): first three letters	Jan,...,Dec	less than or equal to	≤
<b>Time and temperature</b>		registered trademark	®	logarithm (natural)	ln
day	d	trademark	™	logarithm (base 10)	log
degrees Celsius	°C	United States (adjective)	U.S.	logarithm (specify base)	log <sub>2</sub> , etc.
degrees Fahrenheit	°F	United States of America (noun)	USA	minute (angular)	'
degrees kelvin	K	U.S.C.	United States Code	not detected	N
hour	h	U.S. state	use two-letter abbreviations (e.g., AK, WA)	no data	ND
minute	min			not significant	NS
second	s			null hypothesis	H <sub>0</sub>
				percent	%
<b>Physics and chemistry</b>				probability	P
all atomic symbols				probability of a type I error (rejection of the null hypothesis when true)	α
alternating current	AC			probability of a type II error (acceptance of the null hypothesis when false)	β
ampere	A			second (angular)	"
calorie	cal			standard deviation	SD
direct current	DC			standard error	SE
hertz	Hz			variance	
horsepower	hp			population	Var
hydrogen ion activity (negative log of)	pH			sample	var
parts per million	ppm				
parts per thousand	ppt, ‰				
volts	V				
watts	W				

***TECHNICAL REPORT NO. 23-08***

**EKLUTNA RIVER AQUATIC HABITAT MONITORING 2021-2022**

By

Ron Benkert

and

Josh Brekken

Alaska Department of Fish and Game  
Habitat Section, Anchorage  
333 Raspberry Rd., Anchorage, AK 99518

June 2023

This investigation was partially financed by Trout Unlimited.

Cover photo credit: Lower Eklutna River Just Upstream from the Deconstructed Dam

Technical Reports are available through the Alaska State Library, Alaska Resources Library and Information Services (ARLIS) and on the Internet: [http://www.adfg.alaska.gov/index.cfm?adfg=habitat\\_publications.main](http://www.adfg.alaska.gov/index.cfm?adfg=habitat_publications.main). This publication has undergone editorial and peer review.

*Note:* Product names or specific company names used in this publication are included for completeness but do not constitute product endorsement. The Alaska Department of Fish and Game, in accordance with State of Alaska ethics laws, does not favor one group over another through endorsement or recommendation.

*Alaska Department of Fish and Game, Habitat Section  
333 Raspberry Rd., Anchorage Alaska 99518, USA*

*This document should be cited as:*

*Benkert, Ronald C. and J. Brekken. 2022. Eklutna River aquatic habitat monitoring, 2021. Alaska Department of Fish and Game, Technical Report No. 23-08, Anchorage, AK.*

The Alaska Department of Fish and Game (ADF&G) administers all programs and activities free from discrimination based on race, color, national origin, age, sex, religion, marital status, pregnancy, parenthood, or disability. The department administers all programs and activities in compliance with Title VI of the Civil Rights Act of 1964, Section 504 of the Rehabilitation Act of 1973, Title II of the Americans with Disabilities Act (ADA) of 1990, the Age Discrimination Act of 1975, and Title IX of the Education Amendments of 1972.

**If you believe you have been discriminated against in any program, activity, or facility please write:**

ADF&G ADA Coordinator, P.O. Box 115526, Juneau, AK 99811-5526

U.S. Fish and Wildlife Service, 4401 N. Fairfax Drive, MS 2042, Arlington, VA 22203

Office of Equal Opportunity, U.S. Department of the Interior, 1849 C Street NW MS 5230, Washington DC 20240

**The department's ADA Coordinator can be reached via phone at the following numbers:**

(VOICE) 907-465-6077, (Statewide Telecommunication Device for the Deaf) 1-800-478-3648,

(Juneau TDD) 907-465-3646, or (FAX) 907-465-6078

**For information on alternative formats and questions on this publication, please contact:**

ADF&G Habitat Section, 1800 Glenn Highway, Palmer, Alaska 99645 (907) 861-3200

# TABLE OF CONTENTS

	<b>Page</b>
TABLE OF CONTENTS .....	I
LIST OF TABLES.....	I
LIST OF FIGURES .....	I
LIST OF APPENDICES .....	II
ACKNOWLEDGEMENTS.....	III
EXECUTIVE SUMMARY .....	1
INTRODUCTION .....	1
Study Area And Setting.....	2
Fish Distribution Within the Study Area .....	3
Objectives .....	6
METHODS.....	7
Monitoring Sites .....	7
Fieldwork Dates and Collection Effort.....	9
Channel Geometry .....	9
Substrate Composition.....	10
Water Quality.....	11
Quality Assurance Plan.....	11
Data Analysis.....	11
RESULTS AND DISCUSSION.....	12
Eklutna 2U.....	12
Eklutna 6.....	12
Eklutna 8.....	13
Eklutna 10.....	13
CONCLUSION .....	14
REFERENCES CITED .....	15

## LIST OF TABLES

<b>Table</b>	<b>Page</b>
Table 1.– Eklutna River monitoring locations.....	7
Table 2.– Sampling dates and collection effort .....	9
Table 3.– Eklutna River controlled flow releases.....	12

## LIST OF FIGURES

<b>Figure</b>	<b>Page</b>
Figure 1.– Eklutna River Watershed Map.....	5
Figure 2.– Eklutna River Monitoring Site Map.....	8

## **LIST OF APPENDICES**

APPENDIX A: CROSS SECTION PROFILES AND SUBSTRATE COMPOSITION FIELD DATA.....	17
APPENDIX B: WATER QUALITY FIELD DATA.....	27
APPENDIX C: EKLUTNA SITE PHOTOS.....	30

## **ACKNOWLEDGEMENTS**

Trout Unlimited provided financial support for this project. We would like to thank Sean Egan with the National Oceanographic and Atmospheric Administration for assisting in fieldwork during 2021. Kyle Robilland and Michelle Beadle, with the Native Village of Eklutna, also assisted with field work. Scott Graziano, Jonathan Kirsch, and Andrew Kastning with the Alaska Department of Fish and Game (ADF&G)–Habitat Section assisted with field work and ensured that safety was a principal focus. Al Ott with ADF&G–Habitat provided careful peer and technical review of this report. Andi Parrott with ADF&G–Habitat assisted with contracting tasks and ensured that expenses were appropriately charged and timesheets accurate.

Thank you all for your contribution.

## EXECUTIVE SUMMARY

In collaboration with the Conservation Fund, Eklutna, Inc. completed deconstruction of the 60-foot high lower Eklutna River Dam in 2018. The deconstruction project was permitted, in part by the United States Army Corps of Engineers (USACE) which required Eklutna Inc. to collect a suite of pre- and post-project geomorphic and water quality data. These data were necessary to evaluate secondary effects of dam removal and sediment mobilization on the physical characteristics of the lower river for three years following dam removal. During Autumn of 2017, baseline data were collected describing channel geometry, substrate composition, and water quality at three monitoring locations downstream from the dam site. Year 1 (2018) of this monitoring project was completed by Eklutna Inc. in collaboration with the National Oceanographic and Atmospheric Administration (NOAA), the Native Village of Eklutna, and the Alaska Department of Fish and Game (ADF&G)–Habitat. In 2019, Eklutna Inc. contracted with the ADF&G–Habitat to complete the final two years of required monitoring.

In 2021 ADF&G entered into an agreement with Trout Unlimited to continue the Eklutna River monitoring program for an additional three years. An additional monitoring location upstream of the old dam site, previously established in 2017, was added to the monitoring program.

We conducted one sampling event during 2021 and one in 2022, visiting the four established monitoring locations. Two of these monitoring locations were downstream from the deconstructed dam site but upstream from the Thunder Bird Creek confluence; one site was downstream from Thunder Bird Creek; and one site was above the sediment plug upstream from the old dam site. At each of the four sites, a suite of variables including channel geometry, substrate composition, and water quality were recorded.

At the monitoring site located above the deconstructed lower dam (Eklutna 2U) some scouring of the bed was observed compared to previous surveys. There was a slight change in the channel dimensions at this location. Between 2021 and 2022 there was a slight increase in the  $D_{50}$  particle size while the  $D_{84}$  particle size remained categorized as very coarse gravel. Water quality at this site was generally un-noteworthy; however, pH was consistently high, ranging from 8.10 to 8.62.

At monitoring site Eklutna 6 (site just below the deconstructed dam), the channel aggraded nearly a foot in over half the channel between 2021 and 2022. More sand and gravel sized particles were observed in 2022 as compared to 2021 and there was a slight increase in overall substrate size. This is likely the result of the controlled flow releases in the fall of 2021. Water quality at this site was generally un-noteworthy; however, pH was consistently high, ranging from 8.10 to 8.70.

At monitoring site Eklutna 8 (located just upstream from Thunder Bird Creek), the channel exhibited minor changes after the controlled release. At this location it appears that both bed aggradation and subsequent scouring occurred. The overall channel substrate size increased with more gravel and cobbles present in the 2022 survey. Water quality at this site was generally un-noteworthy, but pH was elevated, ranging from 8.09 to 8.56.

All recorded variables from the monitoring site downstream from the Thunder Bird Creek confluence (Eklutna 10) generally remained stable throughout the monitored period. The pH levels were elevated, ranging from 7.95 to 8.68.



## INTRODUCTION

The Eklutna River flows approximately 32 kilometers [km (20 miles)] from the Eklutna Glacier in the Chugach Mountains through Eklutna Lake and into Cook Inlet near the Native Village of Eklutna (NVE) (Figure 1). Thunder Bird Creek is the only major tributary to the Eklutna River and joins it about 3.2 km (2 miles) upstream from Cook Inlet. The Eklutna River has been obstructed by dams for nearly a century. The first obstruction constructed in 1929 was a concrete dam (lower dam) designed for hydroelectric generation. It was in the vertical-walled canyon roughly 5.6 km (3.5 miles) upstream from Cook Inlet. The second dam (upper dam) was constructed in 1955 at the outlet of Eklutna Lake [17.7 km (11-mile) from Cook Inlet] to facilitate power generation and store potable water for Anchorage and the surrounding area. Fish passage was completely blocked by both dams. Over the ensuing decades following the completion of the upper Eklutna River dam, the allocation of flow down the river was dramatically curtailed and maintenance of a natural hydrograph ceased. Now, the majority of flow in the lower Eklutna River is sourced from Thunder Bird Creek. The Eklutna River upstream from the confluence of Thunder Bird Creek is typically supplied only by groundwater and hillside seeps, although on rare occasions Eklutna Lake has overtopped the upper dam conveying brief pulses of lake water down the system. Some reaches of the river downstream from the upper dam are intermittently dry. This has resulted in a relatively flat hydrograph with discharges rarely exceeding 10 cubic-feet-per-second (cfs) throughout the year, this is less than one-tenth of the typical minimum annual discharge measured prior to the completion of the upper dam.

Historically, the Eklutna River was an important subsistence fishery for the Eklutna people and supported populations of all five species of Pacific salmon. According to traditional ecological knowledge (TEK) accounts, some species potentially migrated upstream into Eklutna Lake (Mark Lamoreaux, Biologist, NVE, Personal Communication). A population of landlocked sockeye salmon (*Oncorhynchus nerka*) inhabits the lake today. Although all five species of salmon still occur in the Eklutna River, their populations are substantially depressed from their former abundance due predominantly to dam-related impacts (Mark Lamoreaux, Biologist, NVE, Personal Communication). Currently the majority of anadromous fishes inhabit the lower river below the confluence with Thunder Bird Creek, although in 2007 juvenile Chinook (*Oncorhynchus tshawytscha*) and coho salmon (*Oncorhynchus kisutch*) were documented about 0.8 km (0.5 miles) above the confluence of Thunder Bird Creek. Subsequent fish sampling conducted by the ADF&G Habitat Section in 2019 and 2020 documented spawning chum salmon (*Oncorhynchus keta*) below the Thunder Bird Creek confluence and found juvenile Chinook salmon rearing upstream to the base of a naturally occurring bedrock constriction barrier 1.6 km (1 mile) upstream of Thunder Bird Creek. Juvenile coho salmon have subsequently been found nearly 1.6 km (1 mile) upstream from the deconstructed dam site, and adult coho, chum, and Chinook salmon have been found migrating upstream from the Thunder Bird Creek confluence.

In 2018, Eklutna Inc. completed deconstruction of the 18.2 m (60-foot) high lower Eklutna River dam. It was anticipated that up to 230,000 cubic yards (cy) of sediment could be mobilized down the Eklutna River following dam removal (HDR, 2016), potentially resulting in numerous changes to downstream habitats and fish communities. The project was permitted in part by the United States Army Corps of Engineers (USACE), which required Eklutna Inc. to collect a suite of pre- and post-project geomorphic and water quality data necessary to evaluate the impacts of dam removal and sediment mobilization on the physical characteristics of the lower river over a three-

year period (2018-2020). This included the collection of data describing channel geometry, substrate composition, and water quality prior to and following dam removal.

In 2017, in collaboration with the National Oceanic and Atmospheric Administration (NOAA) and NVE, the ADF&G–Habitat Section began collecting the environmental data specified by the USACE to satisfy permit conditions. Baseline data were collected in May 2017 describing channel geometry and substrate composition prior to dam removal. These measurements were replicated with the inclusion of water quality following dam removal in October 2018. Eklutna Inc. synthesized and reported the findings of these datasets to the USACE in October 2018 to satisfy annual reporting requirements.

In 2019, Eklutna Inc. contracted with the ADF&G–Habitat Section to continue the existing environmental studies program through its completion in 2020 and to produce the remaining requisite annual and final reports.

In 2021, Trout Unlimited contracted with the ADF&G-Habitat Section to continue with this program for another three years, through 2023. This contract will produce one interim report in 2023 and a final report in 2024.

## **STUDY AREA AND SETTING**

The Eklutna River watershed is a glacially influenced system originating in the Chugach Mountains about 48.2 km (30 miles) northeast of Anchorage, Alaska, and drains an area of about 450 square kilometers [(sq km) 174 sq miles] (Figure 1). This watershed is comprised of the 17.7 km (11-mile) long Eklutna River—which historically drained Eklutna Lake—two major tributaries of Eklutna Lake, and Thunder Bird Creek. Thunder Bird Creek is the only substantial tributary downstream of the lake. It joins the lower Eklutna River at about 3.2 km (2 miles) upstream from Cook Inlet and contributes the bulk of the flow conveyed through the lower Eklutna River.

For the purposes of this report, we have divided the system into three components: the upper river (including Eklutna Lake); the middle river between the lake outlet and the Thunder Bird Creek confluence; and the lower river between Thunder Bird Creek and Cook Inlet.

The upper watershed is comprised predominantly of two major tributaries; one conveying meltwater from the Eklutna Glacier and the other dominated by ground water and non-glacial surface runoff. These two dominant tributaries flow roughly 16 km (10 miles) through broad glacial valleys before draining into the narrow, 11.2 km (7-mile) long Eklutna Lake. Eklutna Lake is a natural lake; however, a dam was constructed in 1955 at its outlet to manage water levels to supply potable water and generate hydroelectric power for delivery to Anchorage and the surrounding communities. The completion of this dam resulted in the near total elimination of surface flow from Eklutna Lake into the middle reaches of the Eklutna River. This dramatically changed the natural hydrograph from the lake outlet to Cook Inlet.

The middle Eklutna River watershed stretches approximately 14.4 km (9 miles) from the lake outlet to the confluence of Thunder Bird Creek, the largest tributary within the system. This section transitions from a relatively broad glacial moraine/outwash valley with meandering channel plain and moderate habitat complexity into a constricted canyon with little channel sinuosity and minimal lateral habitats. About 12.9 km (8 miles) downstream from the lake, the lower Eklutna River dam was deconstructed in 2018. This dam, constructed in 1929 for hydroelectric power generation, resulted in the complete blockage of fish passage. Due to the upper dam, which rarely releases any lake water into the middle river, this section of river no longer conveys continuous

flow; rather, it is fed solely by spatially and temporally intermittent ground water contributions and lateral run-off resulting in a flat hydrograph. Three of our four monitoring sites are located within this section.

The lower Eklutna River, stretching roughly 3.2 km (2 miles) from its confluence with Thunder Bird Creek to Cook Inlet, is dominated by non-glacial Thunder Bird Creek flow. Because Thunder Bird Creek is the dominant contributor of flow, water clarity throughout the lower river section is typically much greater than the relatively turbid waters conveyed through the upper and middle river sections. In general, this section transitions from a moderately incised broad canyon reach into a meandering braided floodplain channel prior to joining Cook Inlet near the NVE townsite. Additionally, this section of river flows under both the Old Glenn Highway, the Glenn Highway, and the Alaska Railroad. Our lower most monitoring site is within this river section.

In the fall of 2021, after the 2021 transect survey, controlled flow releases from the Eklutna Lake dam (upper dam) were conducted by opening the dam's spillway gate. Starting on the morning of September 13, about 150 cfs of lake water was released downstream of the dam to the middle and lower Eklutna River. This continued through September 24 when the spillway gate was partially closed and released flows were reduced to about 75 cfs. Then again on September 29 the gate was further closed to reduce the flows to about 25 cfs which continued until October 6 when the gate was completely closed.

## **FISH DISTRIBUTION WITHIN THE STUDY AREA**

The Eklutna River is documented in the Catalog of Waters Important for the Spawning, Rearing, or Migration of Anadromous Fishes [Anadromous Waters Catalog (AWC)] Alaska Department of Fish and Game, 2019] to support all five species of Pacific salmon; however, the current upstream extent of AWC documented habitat extends about 7.3 km (4.5 miles) upstream from Cook Inlet and about 4 km (2.5 miles) upstream of the confluence of Thunder Bird Creek. Additionally, this river is known to support a suite of resident fish species including Dolly Varden (*Salvelinus malma*), rainbow trout (*Oncorhynchus mykiss*), threespine stickleback (*Gasterosteus aculeatus*), slimy sculpin (*Cottus cognatus*), and non-native Alaska blackfish (*Dallia pectoralis*).

In 2019, the ADF&G–Habitat Section conducted a fish sampling effort from the Old Glenn Highway bridge upstream to the dam deconstruction site. During a single day of sampling, 10 baited minnow traps were set along with many opportunistic dip net sweeps. Concurrently, visual observations were made of any adult salmon in the turbid water. Fifty seven juvenile coho salmon, 58 juvenile Chinook salmon, and 26 Dolly Varden were captured upstream to a natural fish passage barrier located 1.6 km (1 mile) upstream from Thunder Bird Creek. Three distinct chum salmon spawning areas were observed downstream of Thunder Bird Creek in 2019, 2021, and 2022. Observations from this sampling effort were added to the Anadromous Waters Catalog.


In spring of 2020, ADF&G Habitat hiked up the Eklutna River channel from the Old Glenn Highway bridge to a beaver pond located about 1.6 km (1-mile) upstream from the lower dam deconstruction site. During the effort, ADF&G partially deconstructed the natural constriction barrier which allowed the channel to adjust to a configuration that was anticipated to provide flow-dependent fish passage. A robust, healthy population of resident Dolly Varden were found distributed throughout the river upstream from the sediment wedge. During a subsequent autumn fish collection effort, several juvenile coho salmon were found above the former constriction barrier and upstream nearly 1.6 km (1 mile) from the deconstructed dam site. This confirmed that juvenile salmon are now able to migrate throughout most of the system during certain flow levels.

Additionally, two adult coho salmon and two adult Chinook salmon were documented about 0.6 km (half mile) upstream from Thunder Bird Creek. In September 2021, using a backpack electrofisher, ADF&G staff documented dozens of Dolly Varden upstream of the former lower dam site.

Eklutna Lake is known to support resident sockeye salmon (also known as kokanee salmon), Dolly Varden, and rainbow trout. The origin of the kokanee salmon in Eklutna Lake is not conclusively known; however, NVE biologist Mark Lamoreaux has stated that traditional ecological knowledge indicates anadromous sockeye salmon migrated into the lake to spawn prior to the construction of the lower Eklutna River Dam in 1929 (Mark Lamoreaux, Biologist, NVE, Personal Communication). Loso et al. (2015) implemented a nitrogen isotope analysis of Eklutna Lake substrates resulting in non-conclusive findings for the presence of a historic population of anadromous sockeye salmon.

Thunder Bird Creek is documented in the AWC to support Chinook and coho salmon as well as a suite of resident fish species. Thunder Bird Falls, a large waterfall, is located about 0.4 km (0.25 miles) upstream from the mouth of Thunder Bird Creek and marks the upstream extent of salmon use.

Figure 1.– Eklutna River Watershed Map.

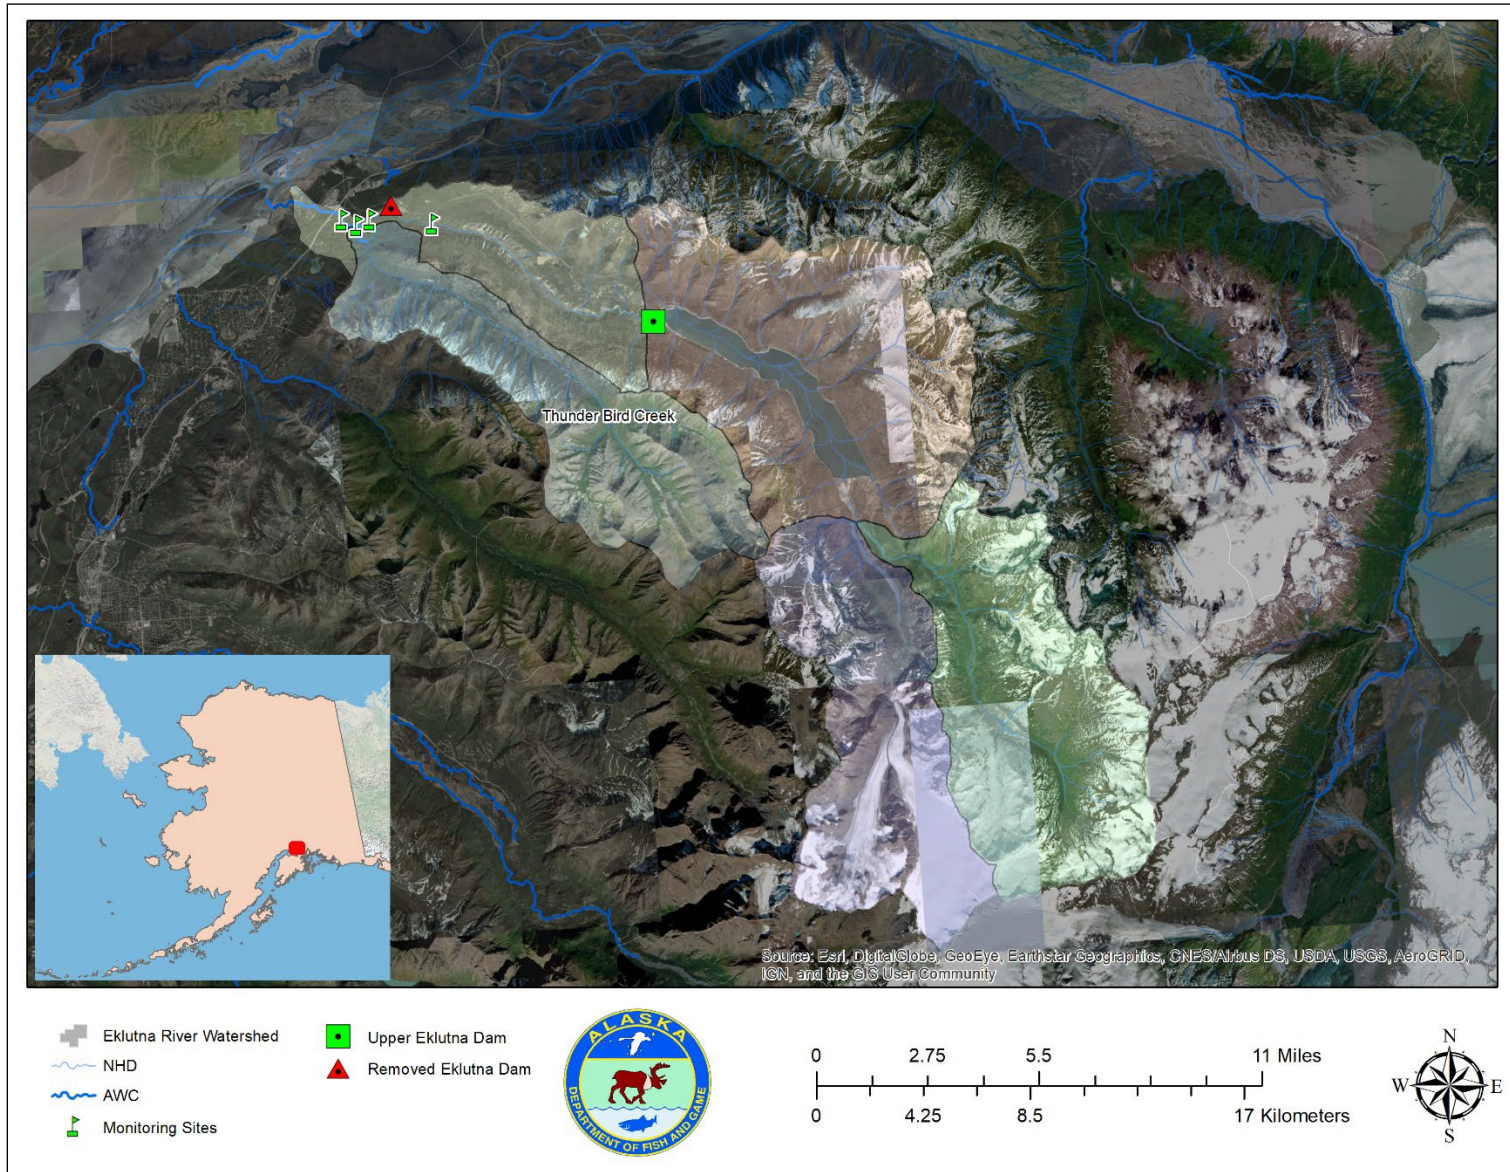

## **OBJECTIVES**

The objective of this monitoring project is to continue to monitor the Eklutna River channel to assess and document conditions as the result of the 2018 dam deconstruction. These conditions include documenting changes to physical habitat in the middle and lower Eklutna River. To achieve the objective, the following tasks were completed:

- Task 1: Select monitoring sites. This included one site upstream from the deconstructed dam and three monitoring sites downstream from the old dam site, (including two sites located in the canyon upstream from the confluence of Thunder Bird Creek, and one site located downstream from the confluence).
- Task 2: Conduct cross-sectional surveys at an established location within each of the full monitoring site locations annually through 2023.
- Task 3: Characterize substrate composition within each of the full monitoring sites using standardized techniques annually through 2023.
- Task 4: Monitor water quality at each monitoring site during regularly scheduled annual field visits.
- Task 5: Record continuous water temperature at the monitoring site upstream from the sediment plug, and one location upstream and one location downstream of the Thunder Bird Creek confluence. Temperature monitors were not installed in 2021 but were installed in 2022 and will be deployed in 2023.

Monitored variables include: channel geometry; substrate composition; and water quality including temperature (C°), dissolved oxygen (% saturation and mg/L), pH, turbidity (NTU), and conductivity (uS/cm).



## METHODS

### MONITORING SITES

The complete suite of monitoring locations is shown in Figure 2.

Prior to the completion of dam removal, three monitoring sites were established in the Eklutna River (Table 1). Two monitoring sites were selected upstream from the Thunder Bird Creek confluence and one monitoring site was selected downstream. Each monitoring site was selected at a location representative of proximal upstream and downstream conditions.

Only channel geometry and substrate composition were recorded during the initial 2017 sample event to represent pre-removal conditions. In October 2018, each monitoring site was revisited and sampled for the first time following the completion of dam removal.

In 2019, an additional monitoring location was established above the sediment wedge upstream from the dam site. This monitoring site was initially established solely to record water quality in conjunction with other monitoring events and has now been added as the fourth monitoring site for this project with full channel geometry monitoring. Additionally, continuous temperature monitoring was established at three of the sites as shown below.

Appendix C provides representative photographs of the four monitoring sites.

Table 1.– Eklutna River monitoring locations.

Site	Latitude	Longitude	Comments
Eklutna 2U	61.4483	-149.3281	Full monitoring site includes continuous temperature monitoring. Located upstream of former lower dam and sediment wedge.
Eklutna 6	61.447	-149.348	Full monitoring site includes continuous temperature monitoring. Located downstream of former lower dam and upstream of Thunderbird Creek.
Eklutna 8	61.445	-149.359	Full monitoring site without continuous temperature monitoring. Located downstream of former lower dam and upstream of Thunderbird Creek.
Eklutna 10	61.448	-149.369	Full monitoring site includes continuous temperature monitoring. Located downstream of Thunderbird Creek.

Figure 2.– Eklutna River Monitoring Site Map





## FIELDWORK DATES AND COLLECTION EFFORT

All 2021 and 2022 sampling dates and collection effort are listed in Table 2.

In both years all four monitoring sites were surveyed. Temperature data loggers were deployed at three of the sites in 2022 from May through October.

Table 2.– Sampling dates and collection effort.

Year	Site	Channel Geometry	Substrate Composition	Water Quality	Temperature Logger
2021	2U	6/8/21	6/8/21	9/3/21	-
	6	6/11/21	6/11/21	9/3/21	-
	8	8/31/21	8/31/21	9/3/21	-
	10	8/31/21	8/31/21	9/3/21	-
2022	2U	6/13/22	6/13/22	5/23/22 6/13/22	5/23/22 thru 10/19/22
	6	6/9/22	6/9/22	5/23/22 6/9/22	5/23/22 thru 10/19/22
	8	6/9/22	6/9/22	5/23/22 6/9/22	-
	10	9/2/22	9/2/22	5/23/22 9/2/22	5/23/22 thru 10/19/22

### Channel Geometry

Physical changes to channel geometry were assessed in 2021 and 2022 by conducting cross-sectional surveys at previously established locations within each of the four monitoring sites. Each of the four survey sites were established and marked on the river-left bank canyon wall with a 2 1/2-inch diameter brass temporary benchmark (TBM). Each end of the survey transect was marked by a 2-foot-long rebar pin driven into the ground and fitted with an orange safety cap. Cross-sectional channel geometry was measured by standard surveying methods using a surveyor's auto level, stadia rod, and fiberglass field tape measuring in tenths of feet. To match existing datasets, measurements were recorded approximately every three feet along the cross-section to ensure a minimum of 20 geomorphic data points were recorded. In addition to these incremental measurements, the following typical geomorphic features were measured:

- top of bank (both banks)
- bottom of bank (both banks)
- thalweg
- edge of water (both banks)
- bankfull elevation (both banks)
- channel irregularities or unique channel features

Graphical representations of channel cross sectional profiles collected during 2021 and 2022 are provided in Appendix A.

### **Substrate Composition**

Composition of stream substrate particles play an important role in providing fish habitat. For example, boulders support resting and feeding behavior and provide refuge from predators by providing eddies and resting pools. Gravel substrates are especially important for many spawning fishes as gravels provide habitat for egg incubation and survival of newly hatched alevin. Fine substrates, like sand and silt, may support feeding or spawning fishes of certain species but if present in high proportions can reduce spawning and incubation habitat quality for salmonids.

Prior to dam deconstruction, we observed substrate conditions upstream from the Thunder Bird Creek confluence that were not conducive to supporting productive endemic fish populations. The substrate was comprised almost entirely of fine and very coarse particles with very limited distribution of gravel. Additionally, larger substrates were embedded and immobile. These conditions were likely the result of a flat hydrograph, diminished flow, and insufficient stream energy necessary to transport substrate other than fine particles through the system. This embedding and armoring of bed surface materials commonly occurs below dams due to interrupted bedload movement. With an estimated 230,000 cy of sediment (HDR, 2016) impounded behind the lower dam (referred to here as the sediment wedge), a key objective of this study is to document the transport of this newly available sediment down the system and document changes in relative proportion of particle classes and by extension facilitate assessment of changes in fish habitat.

An important classification of streambed particle size is to record the median size of all recorded particles ( $D_{50}$ ) in which half of the particles median diameters are larger and half are smaller. Similarly, the  $D_{84}$  particle size is used to highlight the particle size classification of which 84% of measured particles are equal to or smaller in median diameter. Additionally, The  $D_{84}$  classification has been shown to be one predictor of channel roughness and discharge (Rosgen, 2007). Collectively these values are simply standardized index values used to compare substrate composition among sites and through time and can be used for various other hydrologic and hydraulic analyses.

Substrate composition was characterized at each monitoring site using the Wolman Pebble Count methodology (Wolman 1954, cited in USFS 2001) whereby 20 substrate particles were randomly selected from the bed surface, measured, and tallied along each of five transects spanning from edge-water to edge-water straddling the cross-section survey line. Measured particles were then categorized in accordance with methods described by Rosgen (1994). The resulting data yield a representative size distribution of channel substrate particles.

The distribution of particle sizes was graphed for each sample event at each cross section (Appendix A) to display number of particles (% total) of each size class as well as a running cumulative percent. These graphical representations allow us to inspect the following:

1. relative proportion of fine particles ( $< 6$  mm) to the more desirable gravels;
2. changes in the median particle size ( $D_{50}$ );
3. the occurrence of coarser particles ( $D_{84}$ ); and
4. how the dominant substrate class changed through time.

These variables can be used during future analyses to assess potential improvements in substrate quality for providing fish habitat.

### **Water Quality**

Water quality parameters including water temperature, dissolved oxygen, pH, and conductivity were measured at each transect site in 2021 and 2022 using a YSI Pro Plus multiparameter meter. Turbidity was measured both years at each transect site using a Hach 2100Q.

Continuous water temperature readings were not collected in 2021. HOBO Tidbit temperature loggers were deployed at three of the transect sites (Eklutna 2U, 6, and 10) on May 23, 2022 and retrieved on October 12, 2022. The loggers were attached to rebar stakes in scour pools behind large boulders and set to record the water temperature every hour during the ice free season.

### **Quality Assurance Plan**

Field data were recorded on datasheets or in pre-formatted waterproof survey field books. Data were checked for accuracy and completeness by a team member other than the recorder prior to site departure. Data were entered and managed in Microsoft Excel. Data quality control (QC) was ensured by implementing three levels of data quality review:

- QC1: Data were reviewed prior to leaving each site.
- QC2: All data were checked following database entry to identify entry errors.
- QC3: During data analysis, data were inspected for outliers or inconsistencies.

### **DATA ANALYSIS**

The purpose of this monitoring report is to describe the monitoring project and present field data in raw form along with text summaries and graphical representations, but with only minor qualitative analysis. Data collected during this monitoring effort may be used for future statistical analysis.

## RESULTS AND DISCUSSION

Water quality data and cross-sectional surveys were conducted in 2021 and 2022. In between these two data collection efforts, controlled releases from the Eklutna Lake dam occurred (see Table 3).

Table 3.– Eklutna River controlled flow releases (approximate).

Date	Flow (cfs)	Duration (days)
September 13, 2021	150	11
September 24, 2021	75	5
September 29, 2021	25	7
October 6, 2021	0	-

Measurements were collected at the four monitoring sites before and after the controlled releases to document changes. Appendix A provides graphical summaries of cross-sectional data and substrate composition at each monitoring site as well as a table depicting substrate classification (D<sub>50</sub> and D<sub>84</sub>).

All water quality data collected at each monitoring site are presented and a graph displaying continuous water temperature data collected in 2022 is displayed in Appendix B (continuous water temperature measurements were not collected in 2021). Water quality measurements were collected both years and were mostly consistent between the two years with one of noticeable differences. A significant increase in turbidity occurred across the sites, caused by the mobilization of material from the sediment wedge and activated side channels due to the controlled water releases from the dam. A slight increase in pH was also observed.

### EKLUTNA 2U

Scour occurred at the only monitoring site (2U) upstream from the remaining sediment wedge (formed by dam impoundment). The main flow channel widened at this site and the bankfull elevation decreased (-0.4 feet) and the bankfull width decreased slightly (-1.1 feet). Channel depth was relatively unchanged. Some aggradation occurred in a minor side channel that was dry during the surveys.

More silt and gravel sized particles were present in the channel substrate in 2022 than 2021 and overall the channel substrate increased slightly. The D<sub>50</sub> values increased from fine gravel (4-8 mm) to coarse gravel (16-32 mm) while the D<sub>84</sub> values were categorized as very coarse gravel (32-64 mm) for both years.

Based on the continuous temperature monitoring, water temperatures at this site tended to be cooler than Eklutna 6 (downstream of the dam), but warmer than Eklutna 10 (downstream of Thunderbird Creek). The highest daily mean temperature was 8.38 °C on July 4 and the coldest daily mean temperature was 3.40 °C on October 12.

### EKLUTNA 6

Aggradation occurred in the main channel at this monitoring location downstream of the former dam site. Nearly a foot of material aggraded in over half of the channel which caused the bankfull width and bankfull elevation to increase. The aggradation pushed the channel to the left bank (looking downstream) and created a side channel on the right bank.

More sand and larger gravel sized particles were present in 2022 compared to 2021 with an overall slight increase in substrate size. The D50 values were categorized as medium gravel (8-16 mm) for both years, but the D84 value increased from course gravel (16-32 mm) to very course gravel (32-64 mm).

Water temperatures at this site were consistently the warmest compared to the other two temperature monitoring sites, especially early in the season. The highest daily mean temperature was 9.17 °C on June 30 and the coldest daily mean temperature was 2.69 °C on October 12.

### **EKLUTNA 8**

The channel cross-section at monitoring site 8 showed minor changes after the controlled flow releases. Both aggradation and, to a lesser degree, scour occurred at the site, which increased both the bankfull width (+3.7 feet) and the bankfull elevation (+0.2 feet). The channel thalweg migrated from the left bank (looking downstream) to the right bank.

The overall channel substrate increased with more gravels and cobbles present in 2022. The number of silt sized particles also increased. The D50 values increased from fine gravel to course gravel and the D84 increased from course gravel to very course gravel.

Continuous water temperatures were not recorded here but based on water temperature data collected during site visits, the water temperature regime at this site is similar to that of monitoring site 6, which runs a little warmer than the both the site below Thunderbird Creek and the site above the former dam.

### **EKLUTNA 10**

The channel cross section at this monitoring location showed very minor changes after the controlled flow releases. The bankfull elevation, bankfull width, and thalweg remained relatively unchanged. There was some aggradation along the left bank (looking downstream) and minor scour near the right bank.

More large gravel and cobble substrate was present in 2022 and the overall channel substrate size increased. The D50 values increased from course gravel to small cobble and the D84 values increased from very course gravel to large cobble.

Water temperatures at this site were consistently the coolest compared to the other two temperature monitoring sites, especially early in the season. The highest daily mean temperature was 8.14 °C on August 3 and the coldest daily mean temperature was 2.09 °C on October 12. This is likely due to the influence of Thunder Bird Creek entering the channel above the site.

## CONCLUSION

*The ADF&G-Habitat Section plans to continue to observe and document changes to the Eklutna River channel geometry, substrate composition, and water quality resulting from the deconstruction of the lower dam. Additionally, data collected during this study and potential future monitoring may provide valuable information guiding or assessing future actions within the Eklutna River basin. Currently negotiations are being conducted per the 1991 sale agreement between the utilities and the State of Alaska to develop a Fish and Wildlife Plan to mitigate the effects of project operations on the Eklutna River. The current monitoring effort may be extended to assist in the evaluation of the success of any mitigation efforts developed as the result of studies and flow adjustments resulting from these negotiations.*


## REFERENCES CITED

- Alaska Department of Fish and Game [ADF&G]. 201. Catalog of waters important for spawning, rearing or migration of anadromous fishes. Alaska Department of Fish and Game, Juneau, Alaska, USA.
- Kirsch, J. M. and R. Benkert. 2019. Eklutna River aquatic habitat monitoring, 2019. Alaska Department of Fish and Game, Technical Report No. 19-13, Palmer, AK.
- Kirsch, J. M. and R. Benkert. 2019. Eklutna River aquatic habitat monitoring, 2017 through 2020. Alaska Department of Fish and Game, Technical Report No. 21-02, Palmer, AK.HDR, Alaska Inc. (HDR). 2016. Sediment Transport Submittal: Lower Eklutna Sediment Study (draft). November 2016. Anchorage, Alaska.
- Loso, M., B. Finney, R. Johnson, and R. Sinnott. 2015. Evidence for historic anadromous salmon runs in Eklutna Lake: Evaluating the sensitivity of sedimentary nitrogen isotopic data. Final Technical Report. Alaska Pacific University, Anchorage, Alaska.
- USFS (USDA Forest Service). 2001. FSH 2090-Aquatic Habitat management Handbook (R-10 Amendment 2090.21-2001-1). Chapter 20 – Fish and Aquatic Stream Habitat Survey.
- Wolman. 1954. USDA Forest Service 2001. FSH 2090-Aquatic Habitat Management Handbook (R-10 Amendment 2090.21-2001-1). Chapter 20 – Fish and Aquatic Stream Habitat Survey.
- Rosgen, D. L. 1994. A classification of natural rivers. *Catena* 22:169-199.
- Rosgen, D.L. 2007. In Part 654 Stream Restoration Design National Engineering Handbook (210-VI-NEH), J. Bernard, J.F. Fripp, and K.R. Robinson (Eds.). USDA Natural Resources Conservation Service, Washington, D.C. Retrieved from: <https://wildlandhydrology.com/resources/>


**APPENDIX A: CROSS SECTION PROFILES AND SUBSTRATE  
COMPOSITION FIELD DATA**




### Eklutna Cross Section 2U (above former dam)

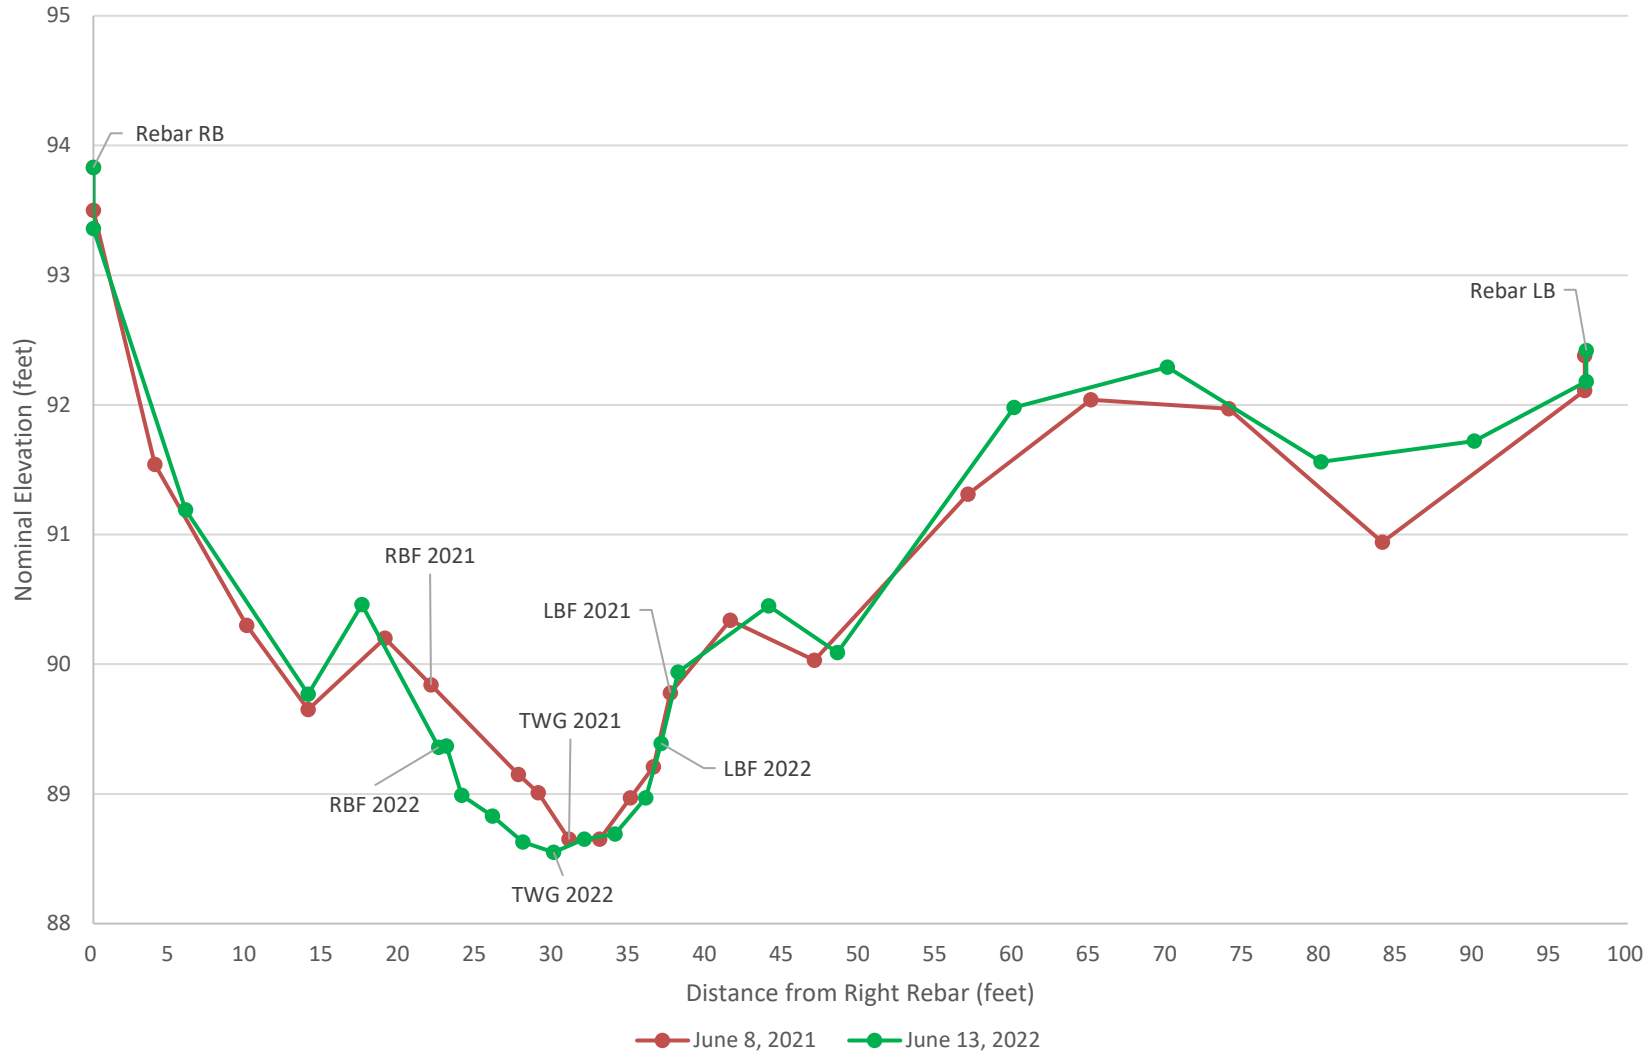


### Eklutna Cross Section 2U Substrate Composition

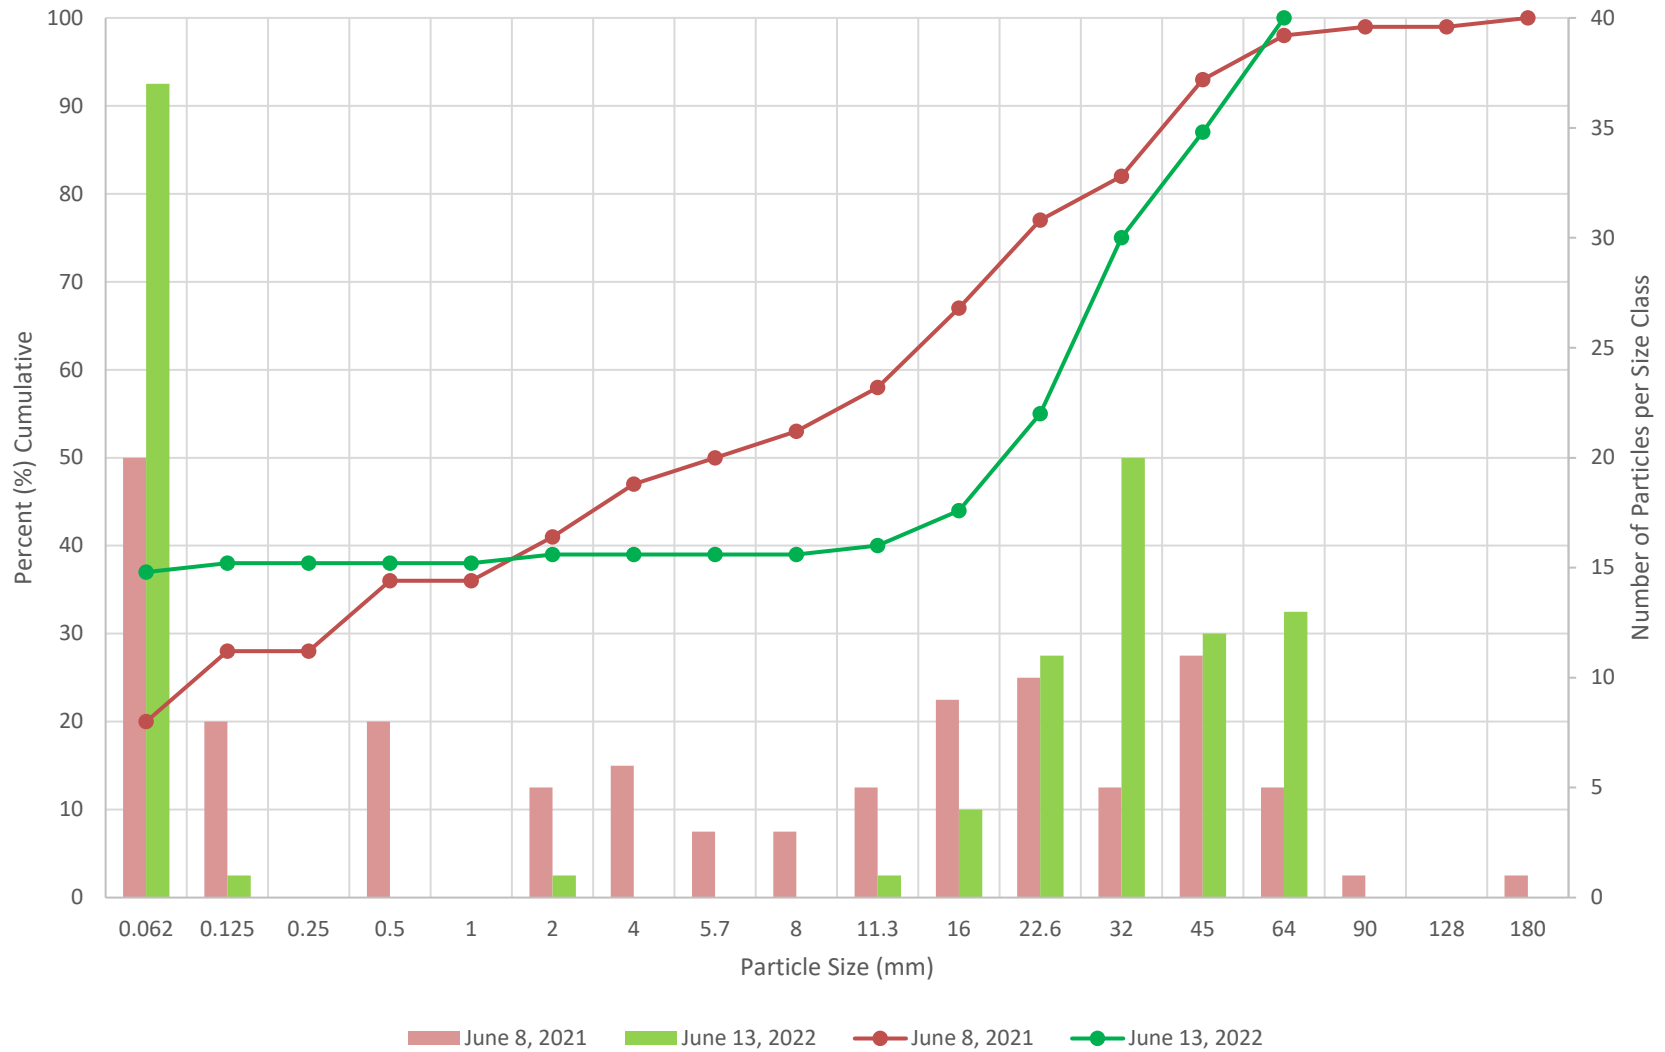


### Eklutna Cross Section 6 (below former dam)

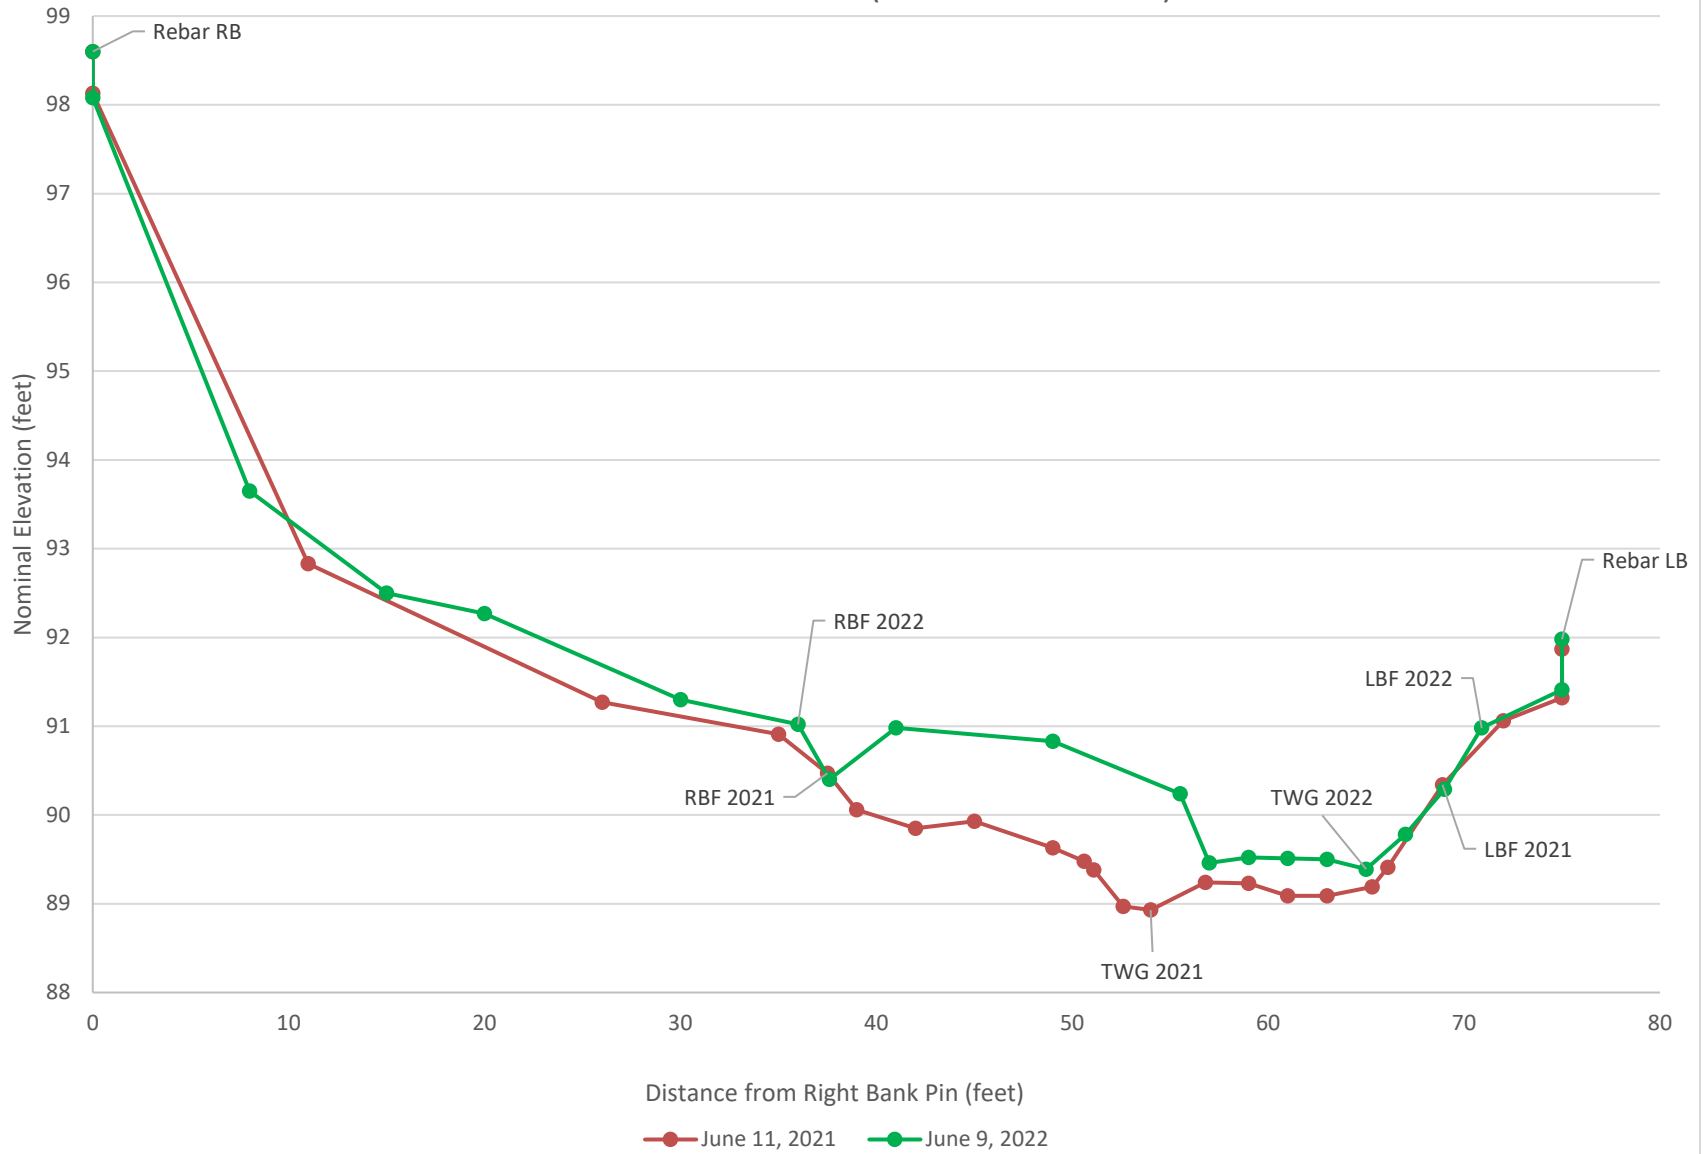


Eklutna Cross Section 6 Substrate Composition

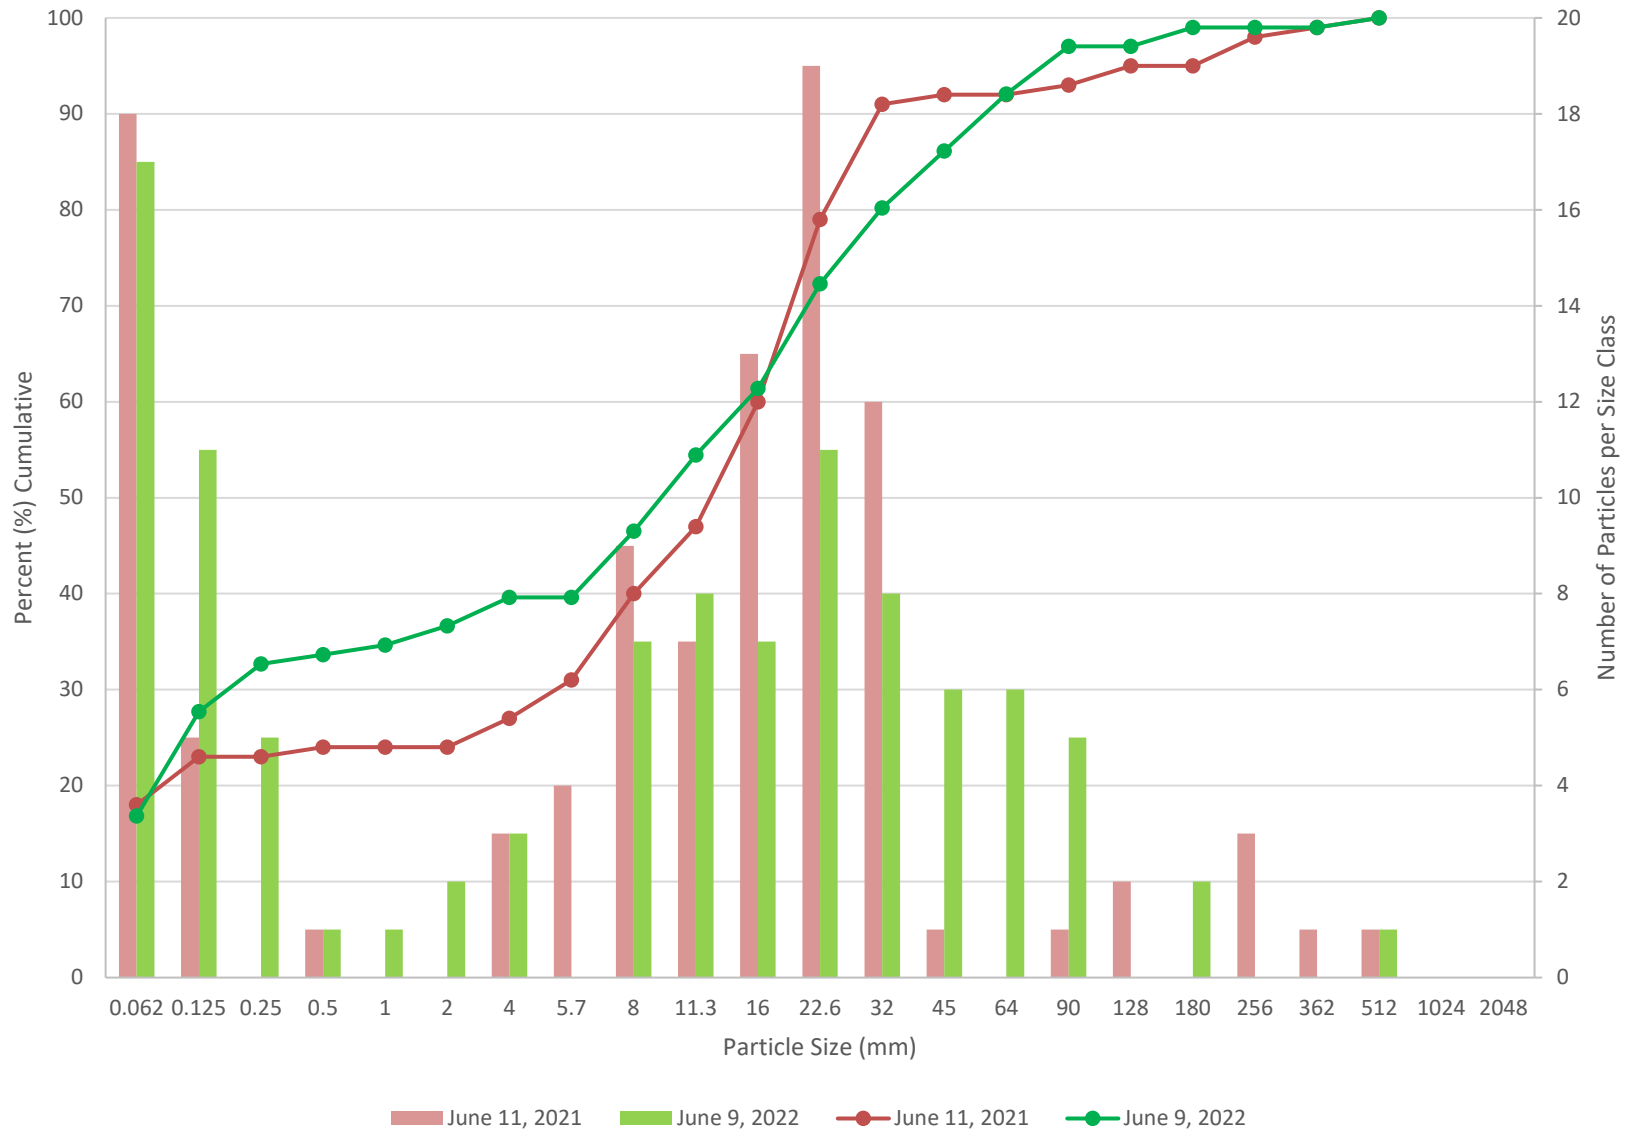


### Eklutna Cross Section 8 (below former dam)

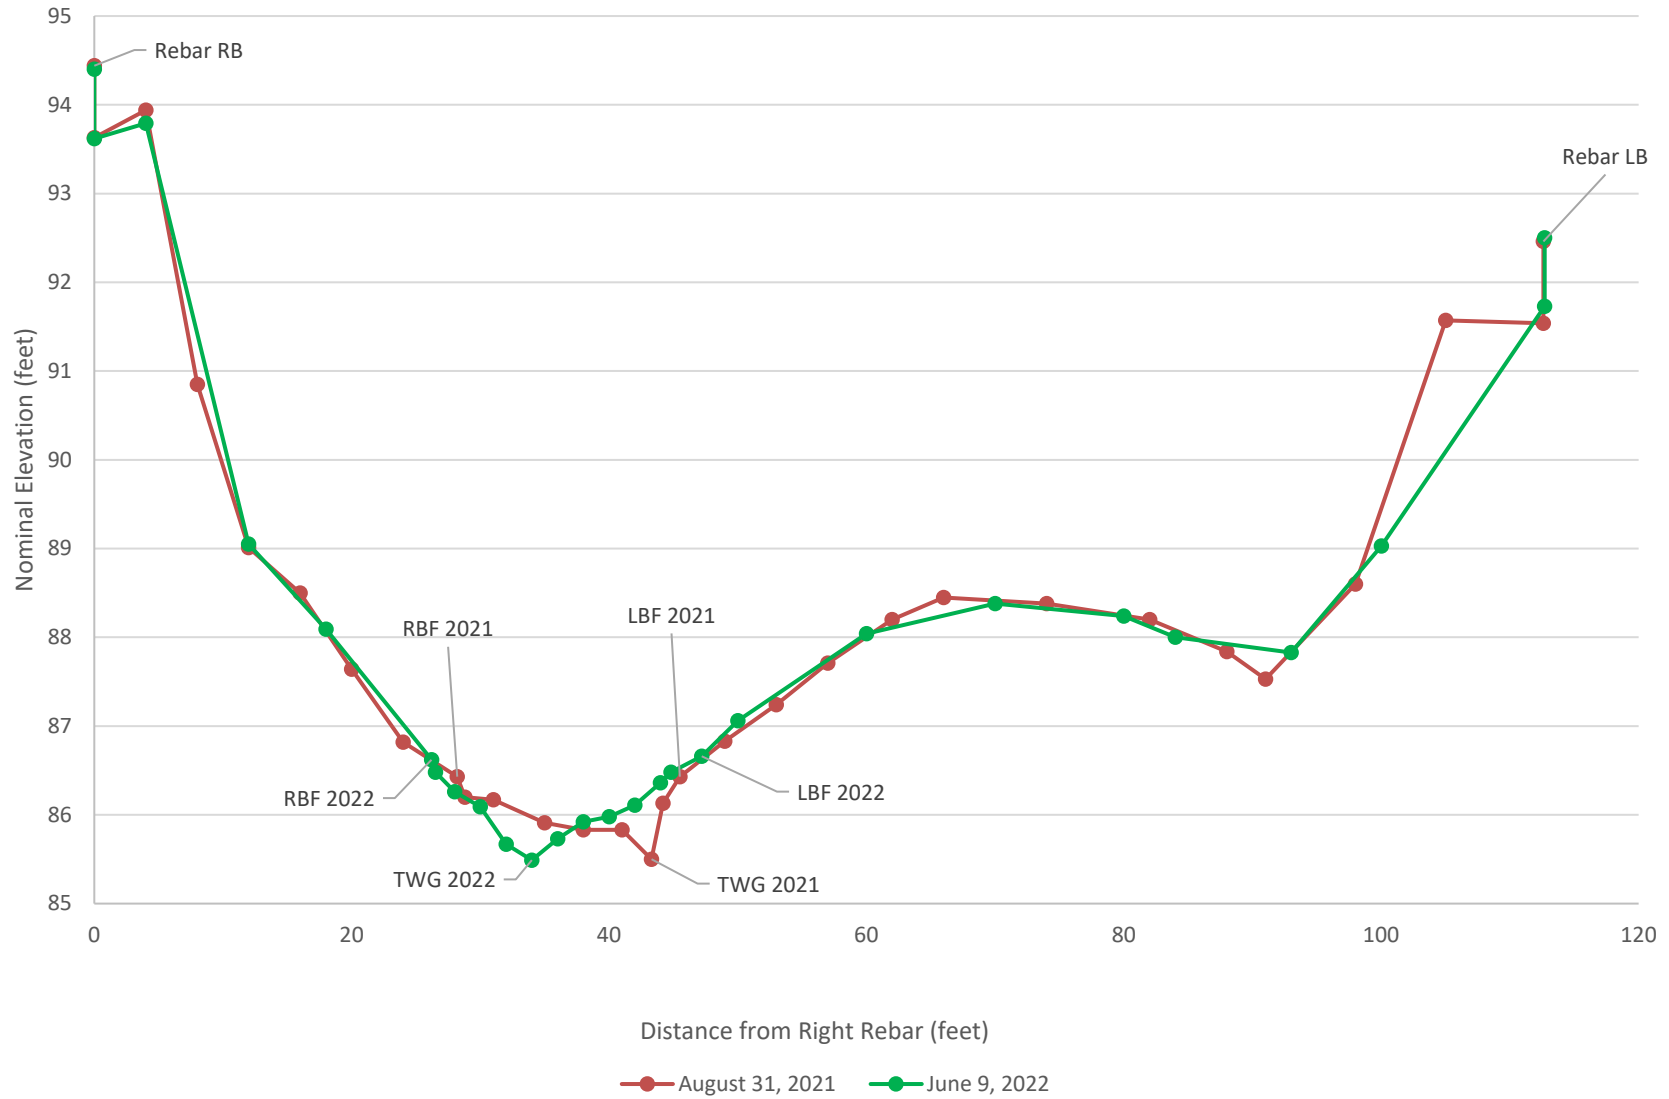


Eklutna Cross Section 8 Substrate Composition

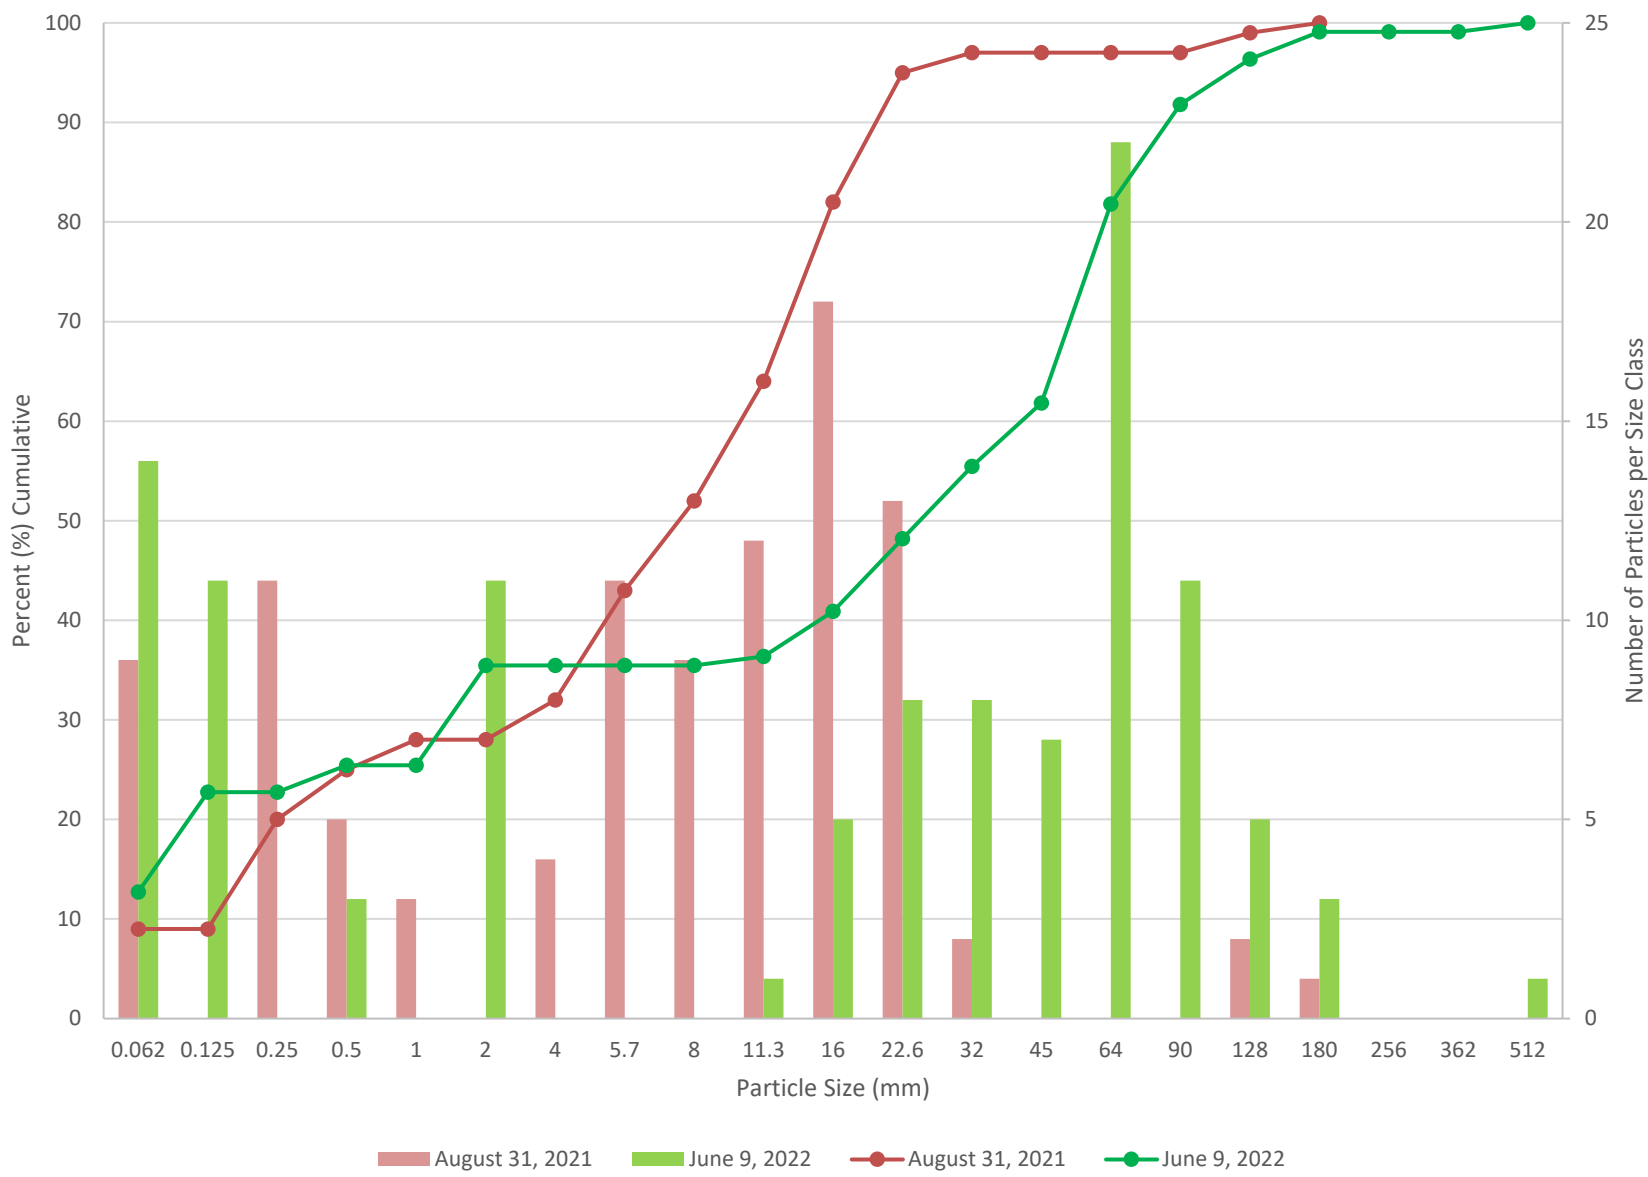

### Eklutna Cross Section 10 (below Thunderbird Creek)

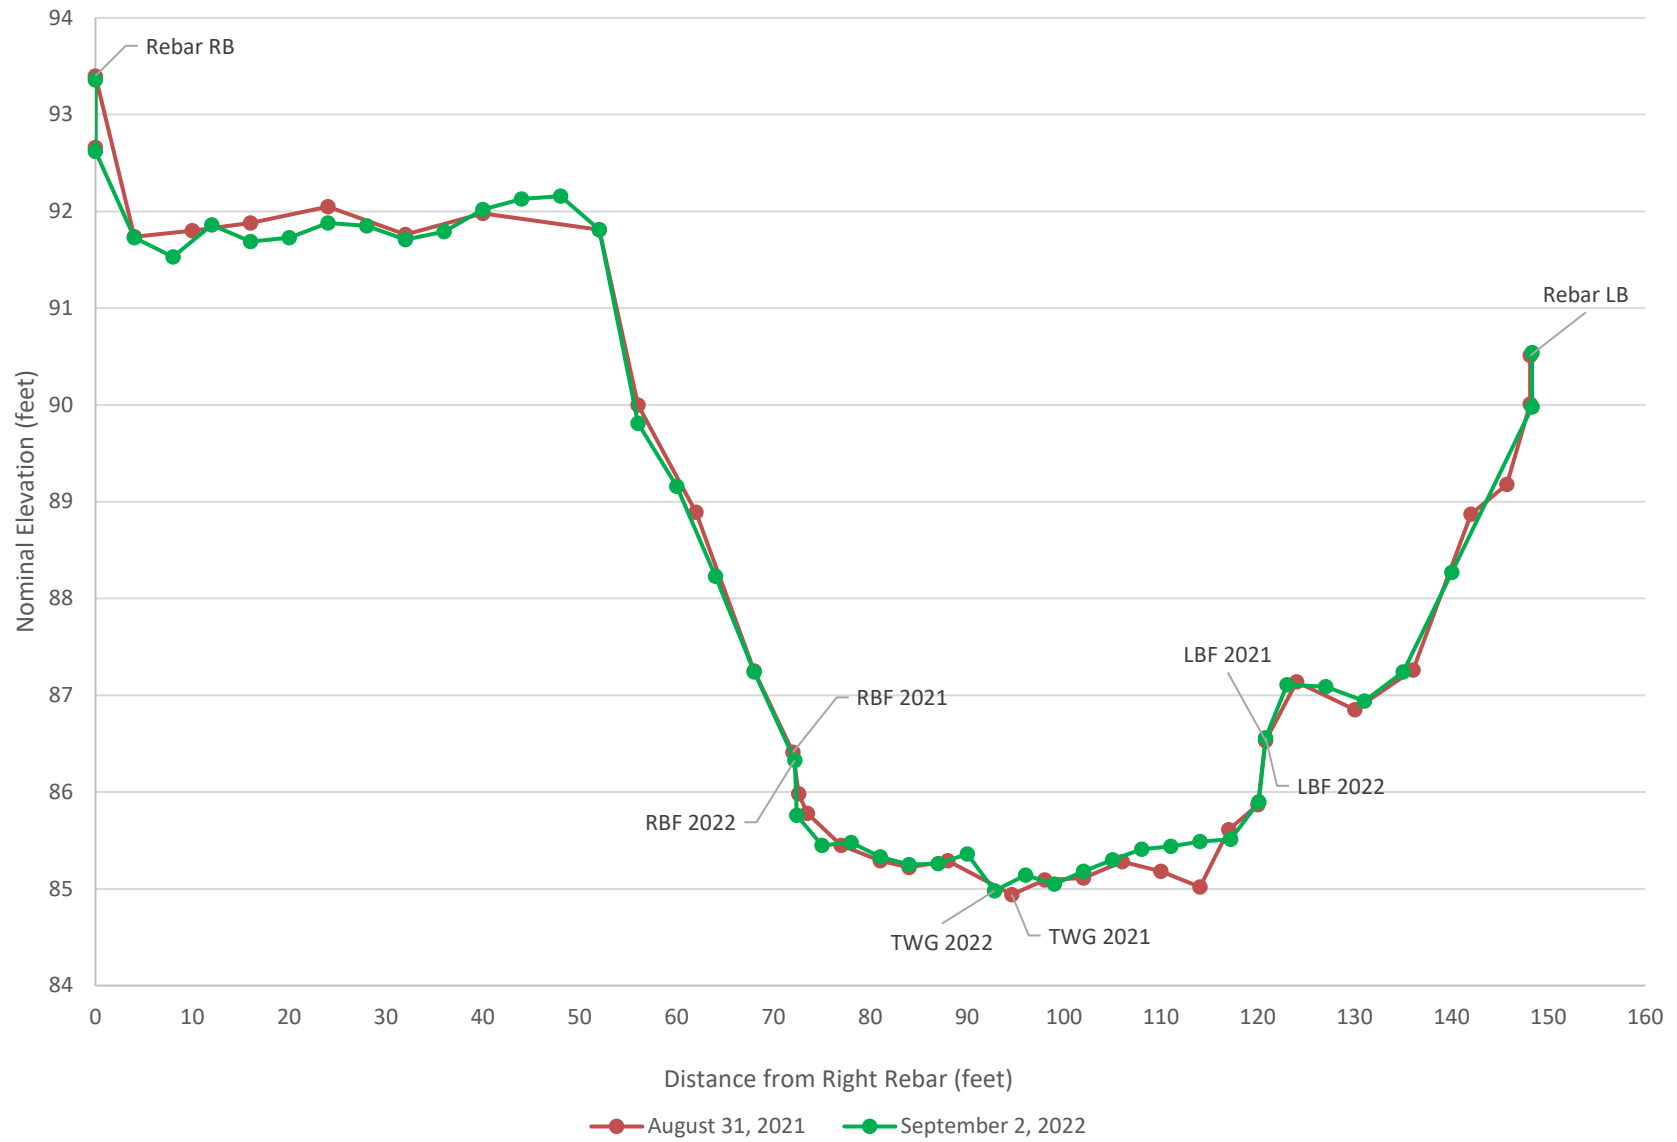

Eklutna Cross Section 10 Substrate Composition

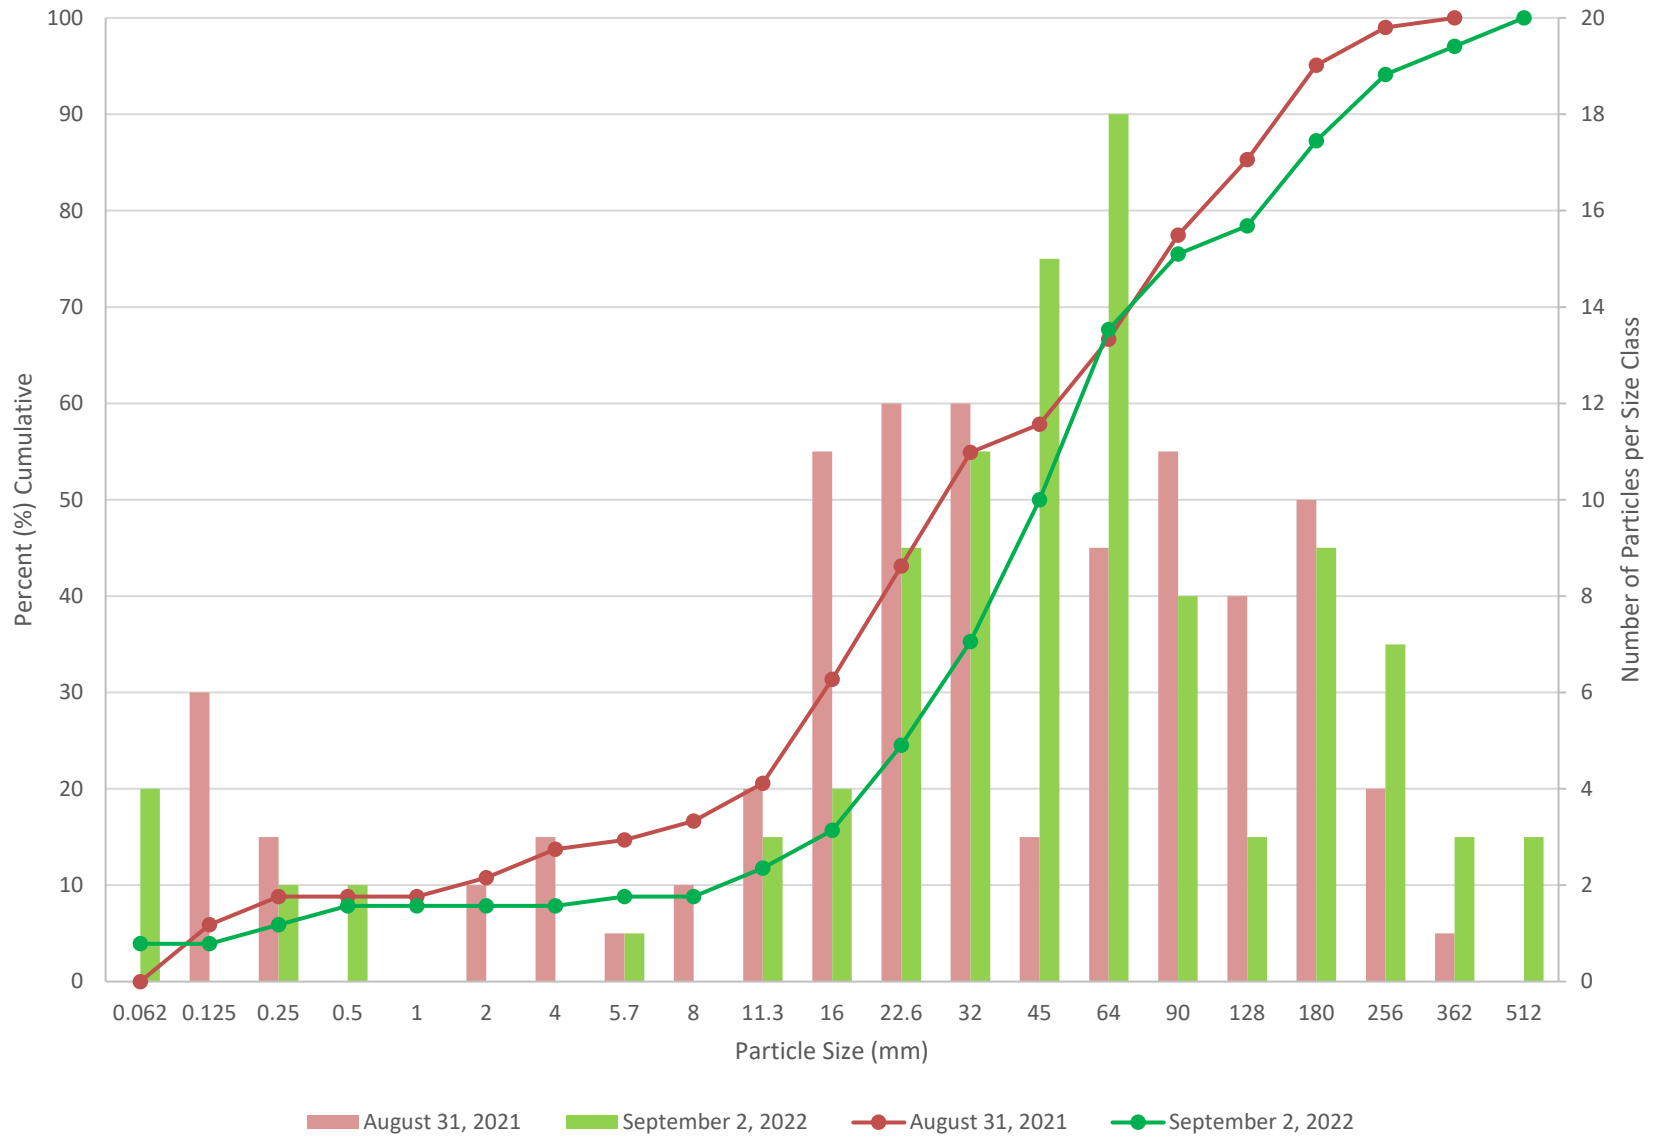



Substrate Composition Table

Year	Eklutna 2U		Eklutna 6		Eklutna 8		Eklutna 10	
	D50	D84	D50	D84	D50	D84	D50	D84
2021	Fine Gravel	Very Course Gravel	Medium Gravel	Course Gravel	Fine Gravel	Course Gravel	Course Gravel	Small Cobble
2022	Course Gravel	Very Course Gravel	Medium Gravel	Very Course Gravel	Course Gravel	Very Course Gravel	Very Course Gravel	Large Cobble

Note: Size ranges for substrate classificaitons: Fine Gravel = 4-8 mm; Medium Gravel = 8-16 mm; Course Gravel = 16-32 mm; Very Course Gravel = 32-64 mm; Small Cobble = 64-128 mm; Large Cobble = 128-256 mm

## **APPENDIX B: WATER QUALITY FIELD DATA**


Water Quality Variables Table

Site	Date	Temperature (°C)	Conductivity (µS/cm)	Dissolved Oxygen (%)	Dissolved Oxygen (mg/L)	pH	Turbidity (NTUs)
Upstream of former dam and sediment wedge							
Eklutna 2U	9/3/21	6.10	279.3	117.7	14.71	8.10	7.28
	5/23/22 <sup>1</sup>	8.26	262.0	126.4	14.86	8.48	153.1
	6/13/22 <sup>2</sup>	7.96	279.0	119.0	14.10	8.62	104.6
Downstream of former dam and upstream of Thunderbird Creek confluence							
Eklutna 6	9/3/21	6.40	283.5	111.8	13.83	8.10	18.5
	5/23/22 <sup>1</sup>	8.46	261.0	128.0	14.97	8.60	140.5
	6/9/22 <sup>2</sup>	8.57	261.0	145.3	16.88	8.70	933.1
Eklutna 8	9/3/21	6.50	282.8	113.5	13.87	8.09	17.65
	5/23/22 <sup>1</sup>	7.88	254.0	124.4	14.76	8.67	144.2
	6/9/22 <sup>2</sup>	8.06	259.0	105.9	12.50	8.56	991.3
Downstream of Thunderbird Creek confluence							
Eklutna 10	9/3/21	6.20	316.2	113.2	13.99	7.95	3.93
	5/23/22 <sup>1</sup>	6.30	236.0	117.8	14.00	8.64	49.87
	9/2/22	5.12	299.0	104.0	13.22	8.68	8.77

1 – water levels relatively high in mainstem Eklutna River and Thunderbird Creek

2 – Thunderbird Creek running exceptionally high – difficult to cross and not able to survey Eklutna 10

Cross Section Daily Average Water Temperature - 2022

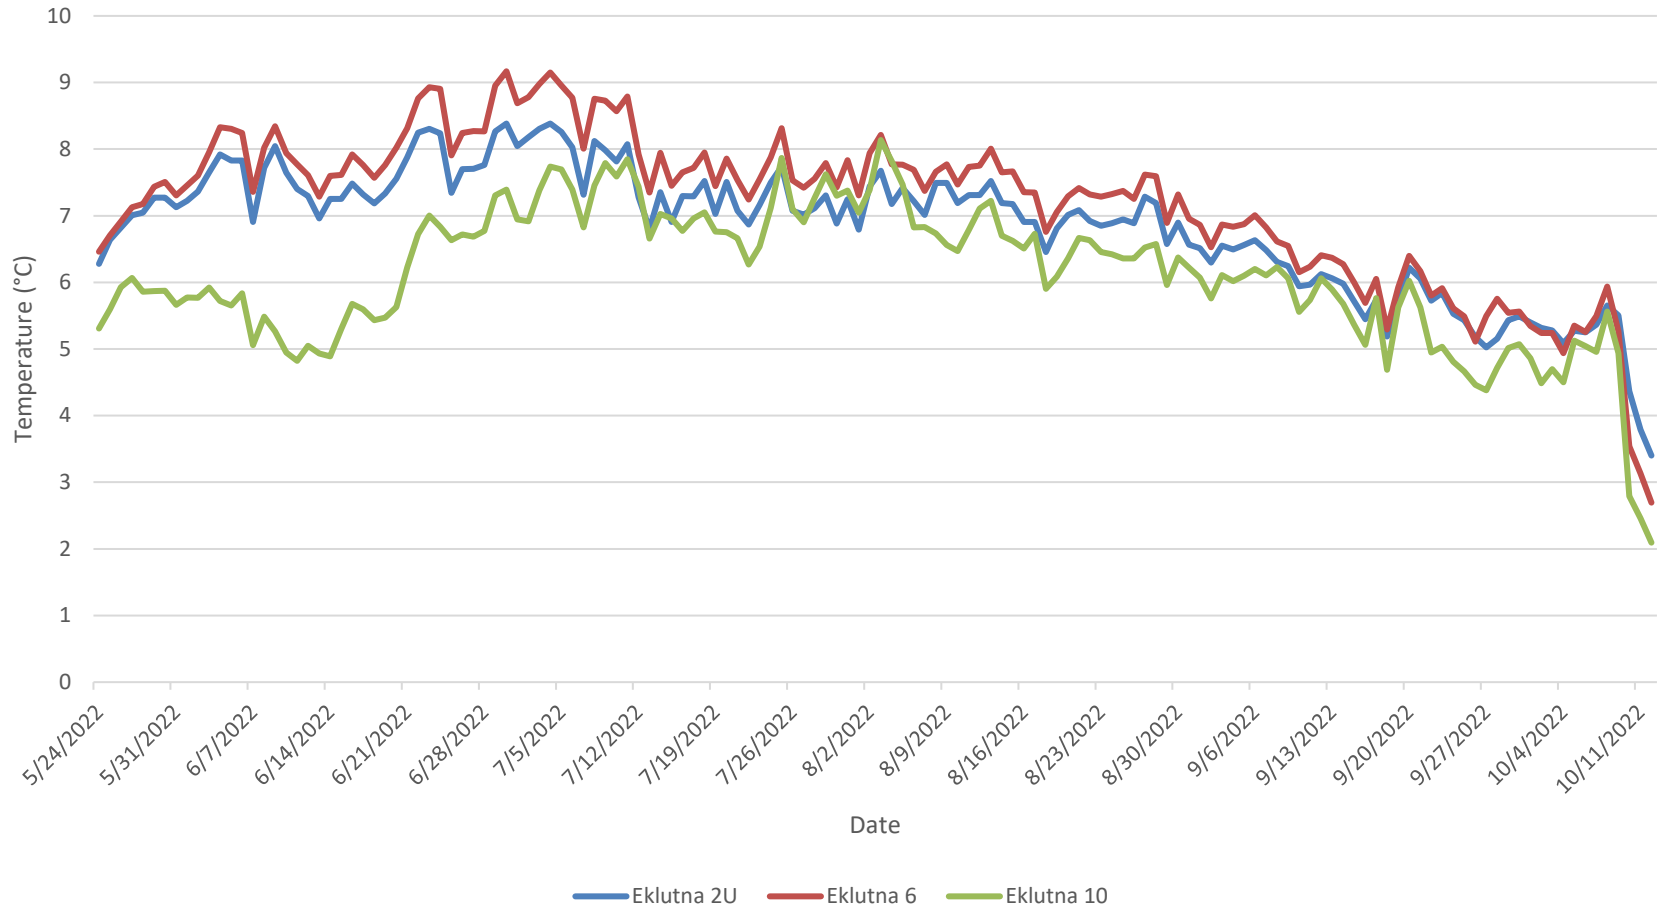

## **APPENDIX C: EKLUTNA SITE PHOTOS**



Eklutna 2U looking upstream – June 8, 2021



Eklutna 6 looking upstream – June 9, 2022





Eklutna 8 looking downstream – August 31, 2021



Eklutna 10 looking upstream – August 31, 2021